


TEL. +41-91-630 07 10  
FAX +41-91-630 07 11  
sales@schertler.com  
www.schertler.com

**SCHERTLER®**  
**C-DYN-G**

SCHERTLER SA  
VIA BEROLDINGEN 18  
6850 MENDRISIO  
SWITZERLAND

### Technical Specs:

- Mechanical decoupling: Butterworth 2nd order
- Nominal impedance: 1500ohm / 1000Hz
- Frequency response: 100 to 12kHz  $\pm$ 3dBu
- Dynamic range: 139dB, 145dB typical
- Sensitivity: 20mV/g
- Sensitivity on instrument: ca. - 25dBm
- Cable length: 260 mm
- Circuit mode:
  1. Balanced via stereo phone plug  
Racomanded - Jack Stereo / XLR cable
  2. Unbalanced via mono phone plug

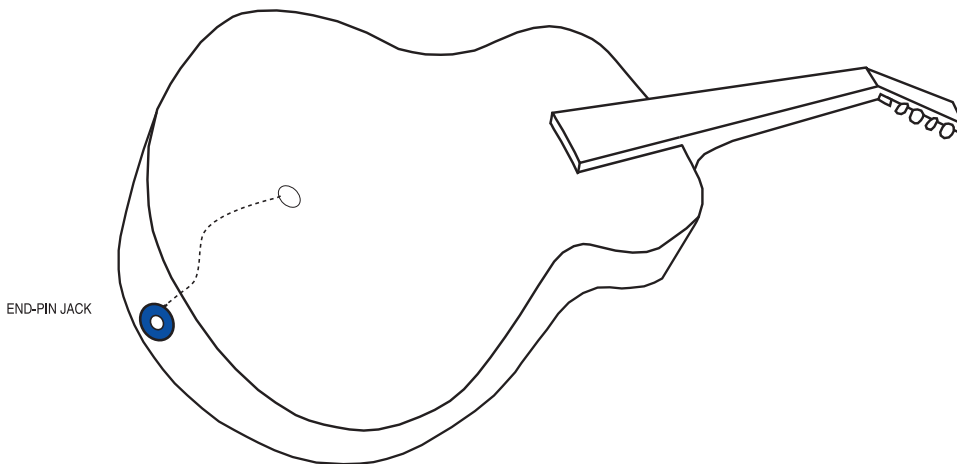

### Installation of the C - DYN - G:

- Remove the strings
- Place the microphone in adequate position inside the guitar with contact glue.
- Test the unit before replacing everything.
- Drill a 12 mm hole for the "Jack" connector.
- Place the endpin "Jack" while locking in place with the outer washer and nut.
- Replace the string set.